


6200 Super Street Trucks All General Truck Rules Apply

- 1) Rules in the Super Street Class are locked in until 2023 (5 Years)
- 2) The cubic inch limit is 468 Displacement 6200 lbs.
- 3) OEM iron cylinder heads, NO Hemi Heads
- 4) Back of engine block may be no closer than 14 inches, plus or minus $\frac{1}{4}$ inch, behind center line of front axle.
- 5) Single Carburetor, limited to a 4150 style flange. A 4150 base 4 barrel carburetor max.
- 6) No Fuel injection systems.
- 7) No dry sump oil systems allowed.
- 8) No rear shocks allowed.
- 9) Factory OEM cast iron intake, Must have casting numbers, No aluminum. Spacer may be used to adapt the intake to tall deck blocks. 2 inch maximum spacer/adaptor from carburetor to intake, plus two $\frac{1}{4}$ inch gaskets
- 10) Can have headers. Exhaust must exit rear of cab.
- 11) No blocked rear suspensions or traction bars. No chains, cables, or devices on front other than OEM. One vertical bolt in springs on rear springs is allowed. No blocks on rear suspension or traction bar. Chains allowed on rear.
- 12) Shackles or spring hangers must be in place and functional. No blocks on frame or shackles to limit suspension system travel. No welding of springs. Can clamp springs, clamps cannot be longer than 3 inches, 4 clamps per side.
- 13) You can run a bumper or a draw bar style hitch. If pulling from rear bumper, the bumper must be mounted to rear of stock frames. Can have bracing from center of bumper to frame rail, but can extend no further than 24 inches forward from the end of the frame. Pulling hitch must be mounted to the bumper. Can pull from a twisted clevis or similar device, (horizontal L hole) Hitch must be no more than 26 inches high and at least 36% of the wheel base from the center of rear axle. 36% of the maximum allowable wheelbase (133 inches) is 47.88. Hitch bracket shall extend not more than 2 inches above the frame rail at attachment point. Hitch brackets must be constructed of 2" x 2" x $\frac{1}{4}$ metal. Forward edge of hitch brackets shall not extend no further than 24 inches forward of hitch point. See picture:

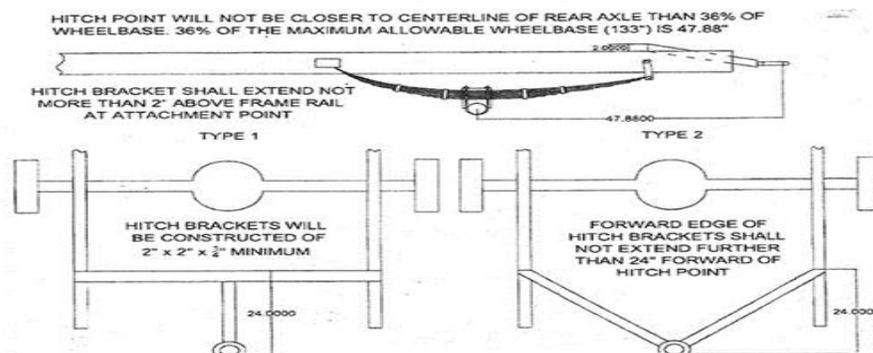

- 14) No visible weights beyond factory bumper in factory position. Weights may hang 6 inches below bumper and covered by a 6 inch air dam. Bottom of weights minimum of 8 inches above ground.
- 15) No fiberglass body. Body must be stock appearing, front bumper must be in stock location. Can have 6 inch air dam below front bumper. No cut out beds.
- 16) Trucks must have complete body less tailgate.
- 17) Front tires cannot track past center of rear tires, or vice versa.
- 18) OEM transfer case and axles: 1 ton max, no other style rear ends allowed.
- 19) Tire size is limited to DOT 33 x 12.50 or 305/70
- 20) Small block motors will be able to run aluminum dual plant intakes, no air gap style, and not external modifications. The cubic inch limit on small block motors will be 383. They can only run OEM cast iron heads and an OEM cast iron block, no aluminum heads or blocks
- 21) Any super street truck and up with engine driven fan blade is required to have metal fan shroud and shall be no more than one (1) inch from radiator core and ½ inch past rear blade.
- 22) All trucks are limited to a maximum of 133 inch wheelbase.
- 23) Any rules agreed on will be enforced. If rules are not followed and truck is found illegal, IT WILL NOT BE ALLOWED to pull for Points or Money that night. NO EXCEPTIONS.