


Hot Stock Class General Trucks Rules Apply

- 1) Single carburetor, limited to a 4150 style flange.
- 2) 468 Cubic inch Limit
- 3) 6200 LB Class
- 4) No Visible Weights
- 5) Factory OEM cast iron intake, and factory aluminum intake for year of vehicle or factory installed fuel injection with factory aluminum intake. No added material. No adapter plate may have 1" spacer plate with 2 paper thin gaskets.
- 6) Factory Production Cast Iron OEM Heads – No Hemi Heads – No Aluminum Heads. Head must have factory Casting #'s on them in factory location.
- 7) No blocked suspension, No traction bars, One vertical bolt in springs and may have 4 clamps per side.
- 8) OEM Transfer case and axles: 1 ton max truck rear end, No other style rear ends allowed.
- 8) All shackles must be in stock location and fully functional, no blocks, no welded springs. (9) Nine total factory springs, Limit of 2 rear shocks in factory position. Shocks cannot be solid or welded.
- 9) Hitch point will not be closer to centerline of rear axle than 36% of wheelbase. 36% of the maximum allowable wheelbase (133") is 47.88" See Picture at the bottom of the page.

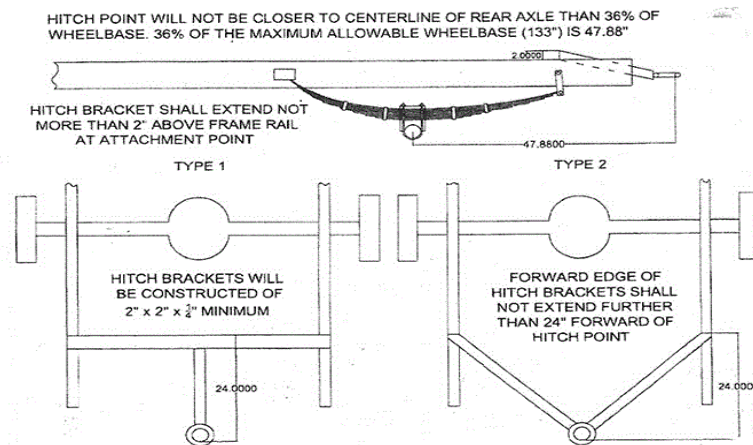

- 10) Complete body less tailgate. No fiberglass bodies, must be stock appearing, front bumper in stock location, can have 6" air dam below front bumper. No cut out beds. Full interior in cab including seat, or racing seat, dash, door panels and factory glass.

- 11) No straight pipes or headers. Exhaust must run through mufflers and must exit one (1) foot rear of cab. Cast Iron Exhaust Only
- 12) Engine must be able to pull 16" of manifold vacuum or more, at 800 rpm (No vacuum pumps). RPM's to be checked with a digital tach. Must make vacuum hose easily accessible and mounted to driver's side inside fender well. Vacuum hoses must be no larger than 1/8 of an inch in diameter and no longer than 6 ft. Must be accessible on the driver's side fender well.
- 13) Street legal DOT tires (REFER TO RULE 1 GENERAL TRUCK RULES)and no larger than 33" tall and 12.5" wide or 305R tire size. Front tires cannot track past center of rear tires or vice versa.
- 14) No brush or grill guard
- 15) Can run headers with flat tappet cam. Must pull 14" of vacuum at 1000 RPM's
- 16) Motor mounts in stock position for make and model of the truck.
- 17) Any Rules agreed on will be enforced. If rules are not followed and truck is found to be illegal. It will not be allowed to pull for points or money that night. No Exception.